

Click

Delphion Intellectual Property Network

[IPN Home](#) | [Search](#) | [Order](#) | [Shopping Cart](#) | [Login](#) | [Site Map](#) | [Help](#)

Patent Plaques

Recognize
the achievement



JP9145947A2: FIXING JIG AND METHOD FOR ADHESION AND FIXATION

[View Images \(1 pages\)](#) [View INPADOC only](#)

Country:

JP Japan

Kind:

Inventor(s):

KUDO KAZUKI
OHIRA FUMIKAZU
KOYABU KUNIO
MATSUNAGA KOJI

Applicant(s):

NIPPON TELEGR & TELEPH CORP <NTT>
[News, Profiles, Stocks and More about this company](#)

Issued/Filed Date:

June 6, 1997 / Nov. 21, 1995

Application Number:

JP1995000302918

IPC Class:

G02B 6/24; G02B 8/40

Abstract:

Problem to be solved: To easily handle a small-sized transparent plate and enable high-precision positioning by providing a recessed part which has a depth less than the thickness of a transparent plate and contains the transparent plate at the center part of a plate-type component and a through hole at a part of the recessed part.

Solution: The recessed part which has a depth less than the thickness of the glass plate 1 and contains the glass plate 1 is formed on the reverse surface of the center part of the fixing jig 6 and the through hole 8 which penetrates the fixing jig 6 is provided at a part of the recessed part. The fixing jig 6 and glass plate 1 which are held by vacuum suction pads 10-1 to 10-3 are moved and the glass plate part is positioned above optical fibers 3 arrayed in grooves on a substrate 2, and the glass plate 1 is pressed against the optical fibers 3. Then, the vacuum suction pads 10 are released to retract them, and an ultraviolet-ray-setting adhesive is injected between the glass plate 1 and substrate 2 and set by irradiation with ultraviolet rays through the through hole 8. After the adhesive is set, only the fixing jig 6 is sucked and collected. Consequently, the optical fibers 3 can be fixed between the substrate 2 and glass plate 1.

COPYRIGHT: (C)1997 JPO

Other Abstract Info:

DERABS G97-354422 DERG97-354422

Foreign References:

(No patents reference this one)

Powered by DB2
and NetData

Alternative
Searches



[Patent Number](#)



[Boolean Text](#)



[Advanced Text](#)



(19)

(11) Publication number: 0

Generated Document.

PATENT ABSTRACTS OF JAPAN

(21) Application number: 07302918

(51) Intl. Cl.: G02B 6/24 G02B 6/40

(22) Application date: 21.11.95

(30) Priority:

(43) Date of application
publication: 06.06.97

(84) Designated contracting
states:

(71) Applicant: NIPPON TELEGR & T
<NTT>

(72) Inventor: KUDO KAZUKI
OHIRA FUMIKAZU
KOYABU KUNIO
MATSUNAGA KOJI

(74) Representative:


(54) FIXING JIG AND METHOD FOR ADHESION AND FIXATION

(57) Abstract:


PROBLEM TO BE SOLVED: To easily handle a small-sized transparent plate and enable high-precision positioning by providing a recessed part which has a depth less than the thickness of a transparent plate and contains the transparent plate at the center part of a plate type component and a through hole at a part of the recessed part.

SOLUTION: The recessed part which has a depth less than the thickness of the glass plate 1 and contains the glass plate 1 is formed on the reverse surface of the center part of the fixing jig 6 and the through hole 8 which penetrates the fixing jig 6 is provided at a part of the recessed part. The fixing jig 6 and glass plate 1 which are held by vacuum suction pads 10-1 to 10-3

(a)

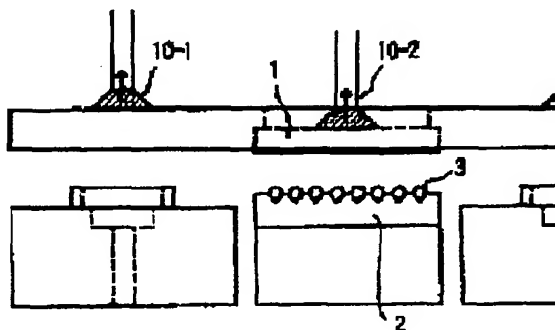

(b)

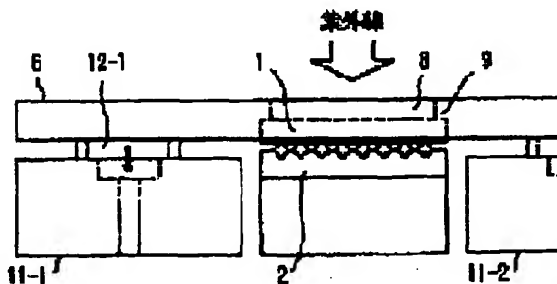

vacuum suction pads 10-1 to 10-3 are moved and the glass plate part is positioned above optical fibers 3 arrayed in grooves on a substrate 2, and the glass plate 1 is pressed against the optical fibers 3. Then, the vacuum suction pads 10 are released the retract them, and an ultraviolet-ray-setting adhesive is injected between the glass plate 1 and substrate 2 and set by irradiation with ultraviolet rays through the through hole 8. After the adhesive is set, only the fixing jig 6 is sucked and collected. Consequently, the optical fibers 3 can be fixed between the substrate 2 and glass plate 1.

<=>



COPYRIGHT: (C)1997,JPO